


723 Series

Used with flat-bed or friction feed plotters, this product is a single liner stencil with a clear mylar backing only. Impact resistant and highly flexible single liner stencil designed for both clean and uneven surfaces. High-tack adhesive. Does not contain PVC and is safe for laser cutting.

*Available only in single 10 yard rolls.

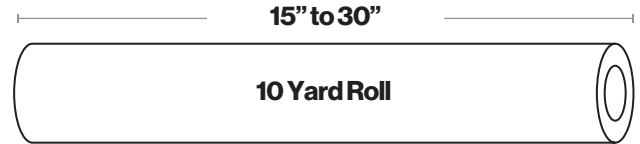

Friction Fed (723)

Standard Widths

15”
25”
30”

Storage & Shelf Life

Store new stock behind current stock. Store in a clean, dry place. Temperature of 70°F (21°C) +/- 6°F and 40% to 50% relative humidity are recommended. Shelf life is 12 months from date of manufacture.

While we believe them to be reliable, the statements and information herein are only for general guidance and are not warrants or guarantees for accuracy and completeness. The user must, by test or otherwise, determine suitability for this purpose. There is no warranty of fitness for a particular purpose. Our standard term and conditions of sale apply exclusively to all orders, and all liability for damages of any kind, including consequential, exceeding purchase price is excluded. No one is authorized by us to make oral warranties. We reserve the right to make changes without notice or obligation in our products and publications.

Nominal Values

The following data are nominal values based on PSTC, ASTM and other standard tests. The data should not be considered as specifications.

Adhesive

High tack/Acrylic

Total Thickness (mil)

30 (0.762 mm)

Tensile Strength (lbs/in)

5.0(22.72 N/25mm)

180° Adhesion to Steel (oz/in)

46(13.01N/25mm)

Elongation (% at break)

450

Liners

Clear PET outside liner

Get in touch

www.Ublaststencil.com



Phone
706-283-2289
706-283-2280

Toll free
1-855-590-7070
Fax
706-283-2290



Email
1039 Crosstie Drive,
Elberton, GA 30635



Address
info@ublaststencil.com

